SONOROU'S ACCESSORIES

Sonorous provides audio&video related products with focus on quality, functionality and aesthetics. Founded in 2004, a solid position and reputation worldwide has been built up over the years. Now represented worldwide in more than 50 countries via strong partnerships with a global network of distributors.

Our products are engineered to meet the demanding needs of today's electronics and represent an attentive monitoring of market trends and changes. Continuous research into materials and finishes has been distinguishing characteristics of Sonorous.



AUDIOVISUAL ACCESSORIES

INDEX


| WALL MOUNTS | 5-26 |
|-------------|-------|
| CABLES | 27-34 |
| ACCESSORIES | 35-38 |

Wall Mounts

| FIXED | CEILING |
|-------------|---------------|
| TILT | PROJECTOR |
| SLIM | SOUNDBAR |
| SLIM TILT | DESK |
| OMNI - MOVE | CABLE CHANNEL |

4

FIXED

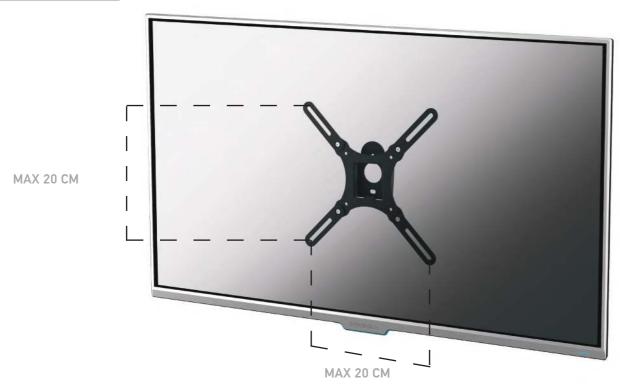


SUREFIX 211

SCREEN SIZE 22"/37"

MAX. LOAD 25 KG

DISTANCE TO WALL 18 MM

UNIVERSAL UNIVERSAL WARRANTY INCLUDED FALL PROFF 100x100, 200x20

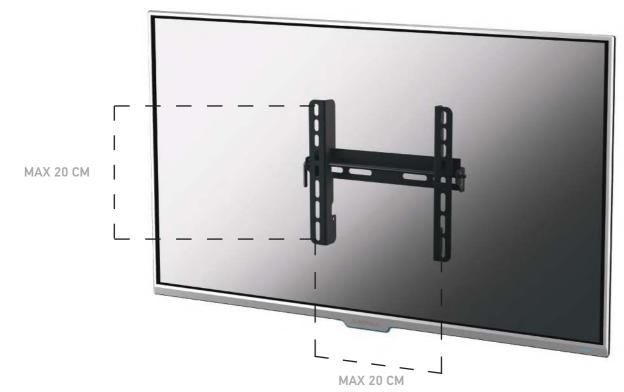

SUREFIX 132

SCREEN SIZE 22"/42"
MAX. LOAD 40 KG
DISTANCE TO WALL 29 MM

UNI) NIVERSAL W

UIFETIME WARRANTY

FALL PROFF

VESA 100x100 200x100, 200x200 MAX. LOAD

DISTANCE TO WALL 39 MM

ADJUSTABLE POSITION


30 KG

MAX 20 CM

SUREFIX 220

SCREEN SIZE 22"/42"

MAX. LOAD 40 KG
DISTANCE TO WALL 36 MM

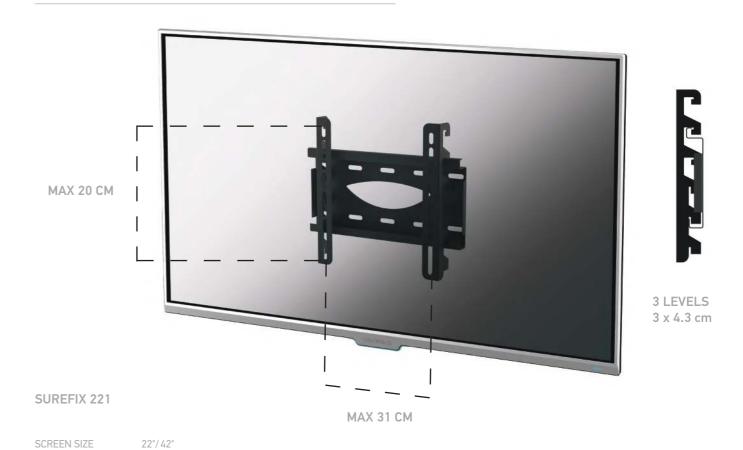

6 WALL MOUNTS



SUREFIX 142

SCREEN SIZE 26"/55" MAX. LOAD 50 KG DISTANCE TO WALL 29 MM



SUREFIX 230 MAX 40 CM

SCREEN SIZE 32"/55" MAX. LOAD 50 KG DISTANCE TO WALL 36 MM



DISTANCE TO WALL 53 MM ADJUSTABLE POSITION

SCREEN SIZE

MAX. LOAD

32"/55"


40 KG




SUREFIX 152

SCREEN SIZE 40"/60" MAX. LOAD 70 KG DISTANCE TO WALL 29 MM


MAX 60 CM

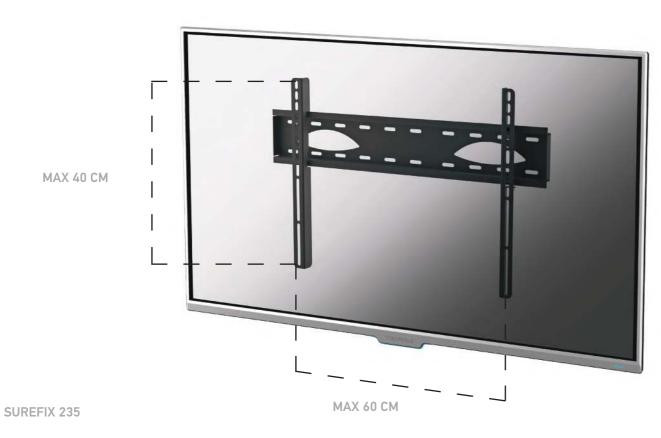

32"/60" SCREEN SIZE MAX. LOAD 60 KG DISTANCE TO WALL 36 MM

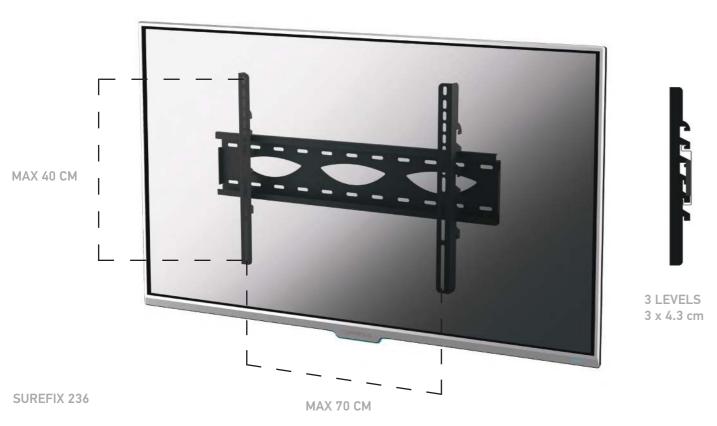


SCREEN SIZE 32"/65" MAX. LOAD 50 KG DISTANCE TO WALL 53 MM ADJUSTABLE POSITION

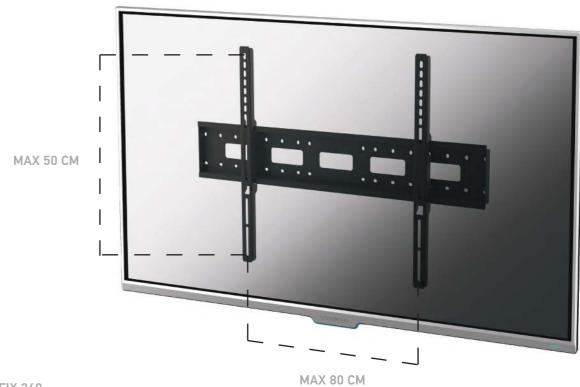

SUREFIX 240


SCREEN SIZE 40"/82" MAX. LOAD 80 KG DISTANCE TO WALL 36 MM

TILT

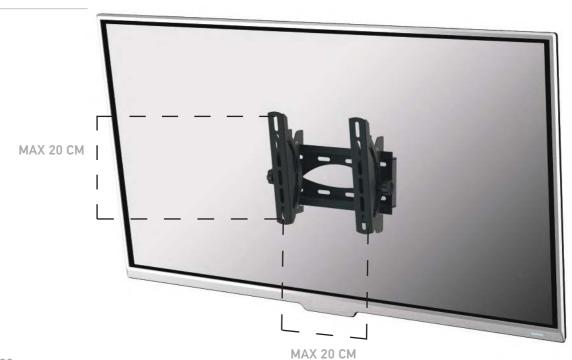


SUREFIX 320

SCREEN SIZE 22"/42" MAX. LOAD 30 KG DISTANCE TO WALL 69 MM TILT ±10°

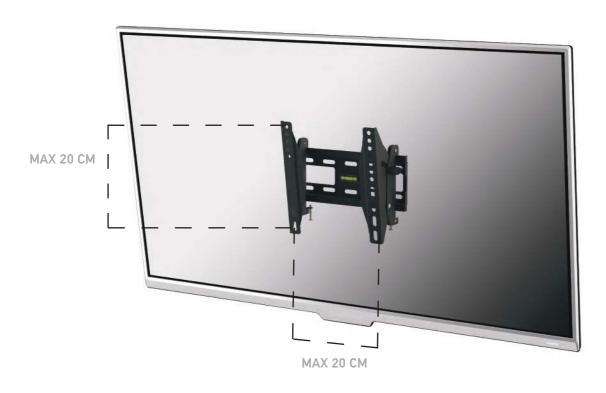

SUREFIX 322

SCREEN SIZE 22"/42" MAX. LOAD 30 KG DISTANCE TO WALL 69 MM TILT ±10°

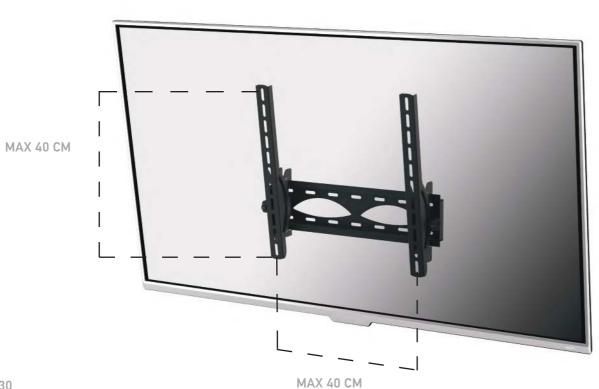

SUREFIX 330


SCREEN SIZE 26"/55 " MAX. LOAD 40 KG DISTANCE TO WALL 69 MM TILT ±10°

MAX 40 CM

SUREFIX 332


SCREEN SIZE 55'' MAX. LOAD 40 KG DISTANCE TO WALL 69 MM TILT +10°/-15°


MAX 40 CM






SCREEN SIZE 40"/60" MAX. LOAD 50 KG DISTANCE TO WALL 69 MM TILT ±10°

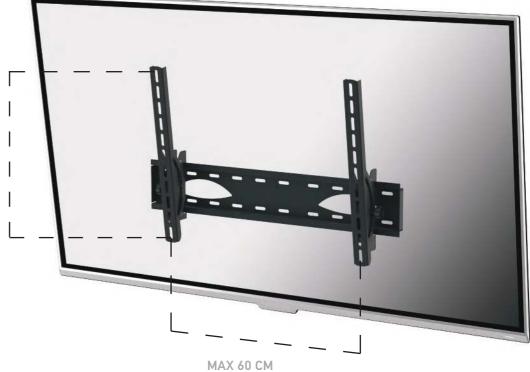

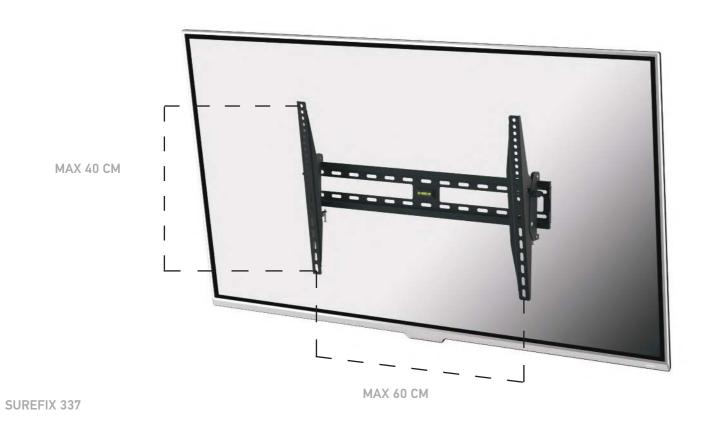

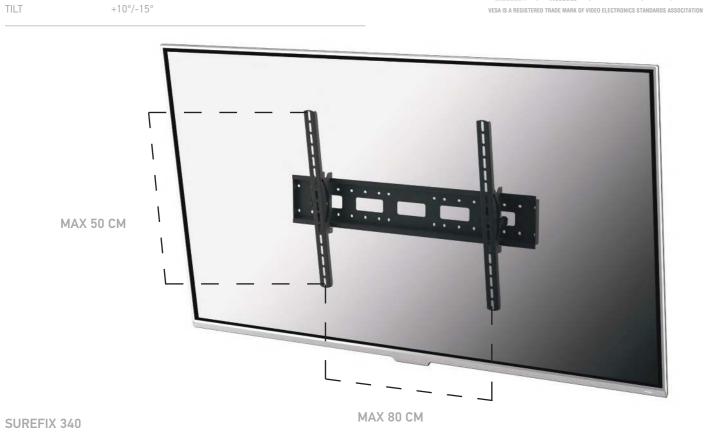

SCREEN SIZE 40"/65" MAX. LOAD 70 KG DISTANCE TO WALL 72 MM TILT ±10° LIFETIME WARRANT VESA IS A REGISTERED TH

SCREEN SIZE

MAX. LOAD

DISTANCE TO WALL 69 MM

40"/60"

50 KG

SLIM



SUREFIX 410

| SCREEN SIZE | 26"/50" |
|------------------|--------------------|
| MAX. LOAD | 50 KG |
| DISTANCE TO WALL | 1/ ₁ MM |

UESA 2002∞

LIFETIME WARRANTY


ALL HARDWARE FALL PROFF

VESA 2002∞
3002∞, 4002∞

VESA 15 A REGISTERED TRADE MARK OF VIDEO ELECTRONICS STANDARDS ASSOCITAT




| SCREEN SIZE | 23"/50" |
|------------------|---------|
| MAX. LOAD | 30 KG |
| DISTANCE TO WALL | 13 MM |

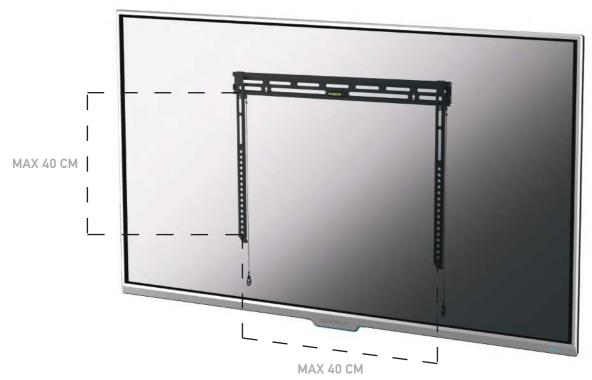

SUREFIX 421

SCREEN SIZE 32"/60" MAX. LOAD 40 KG DISTANCE TO WALL 13 MM

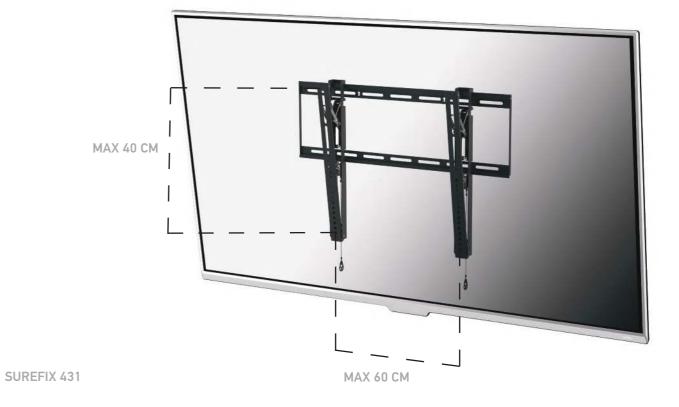

OMNI-MOVE

DISTANCE TO WALL 25 MM

32"/60"

40 KG

-10°


15°

360°


SCREEN SIZE

MAX. LOAD

TILT

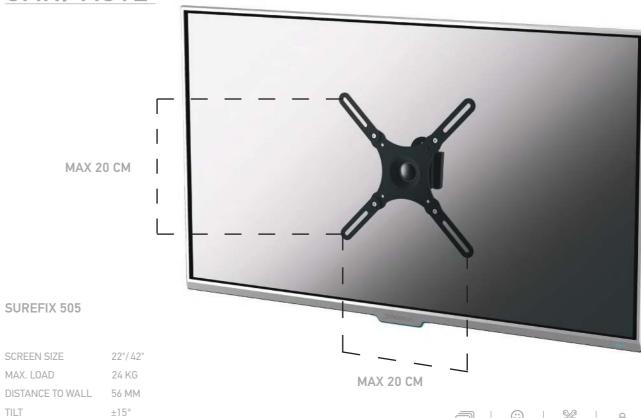

SLIM TILT

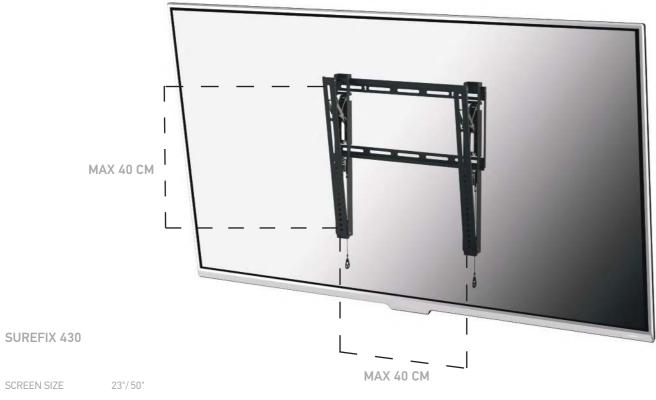



SCREEN SIZE MAX. LOAD 30 KG DISTANCE TO WALL 25 MM TILT

16 WALL MOUNTS


SWIVEL

ROTATE

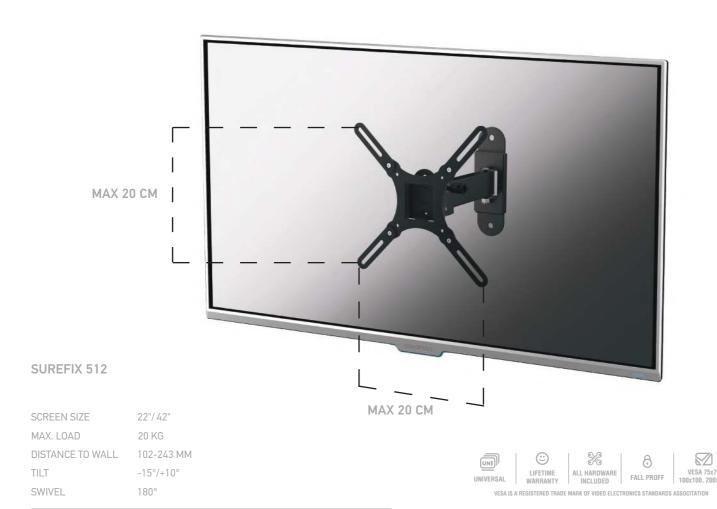


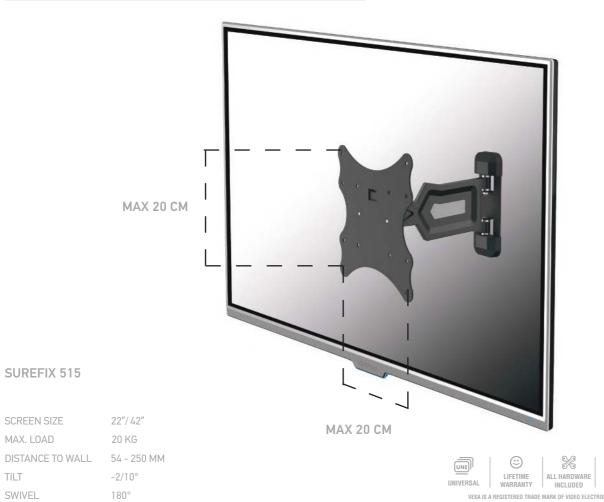



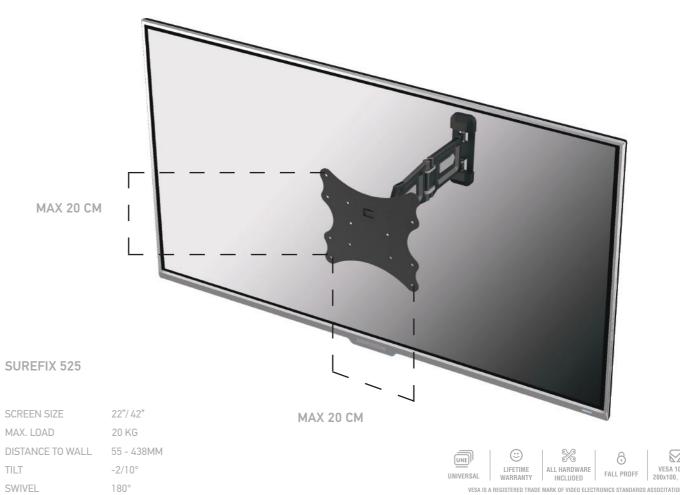

18 WALL MOUNTS WALL MOUNTS 19

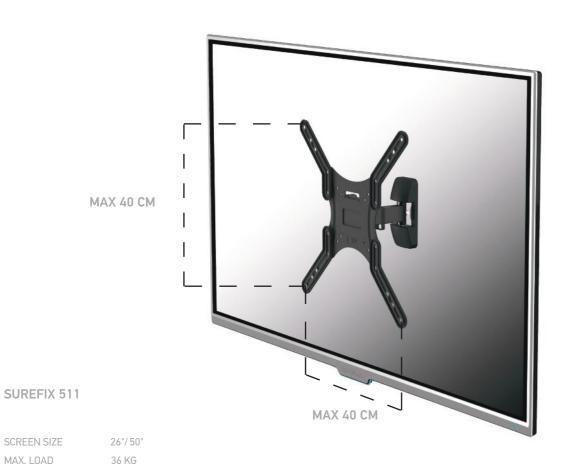

DISTANCE TO WALL 54.5-211 MM

DISTANCE TO WALL 37-536 MM

±10°

120°

TILT


SWIVEL


TILT


SWIVEL

-2°/+10°

180°

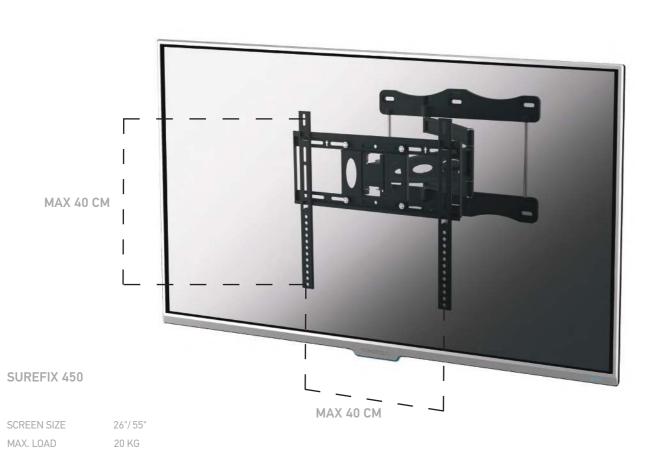

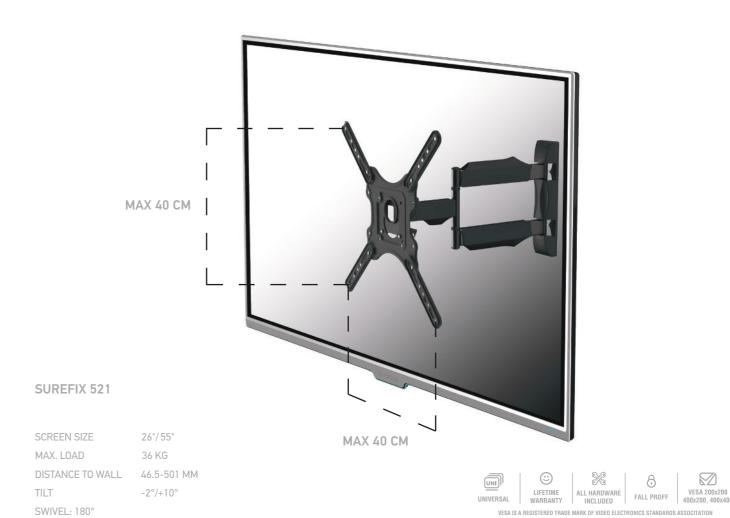


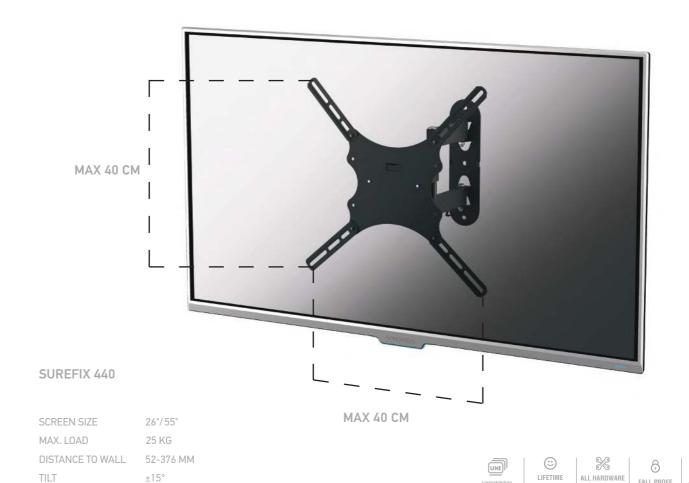



20 WALL MOUNTS 21

SWIVEL

180°

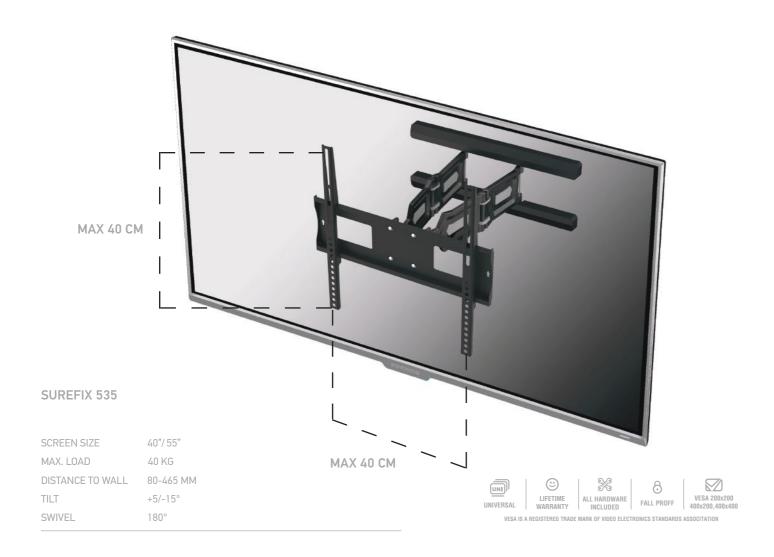

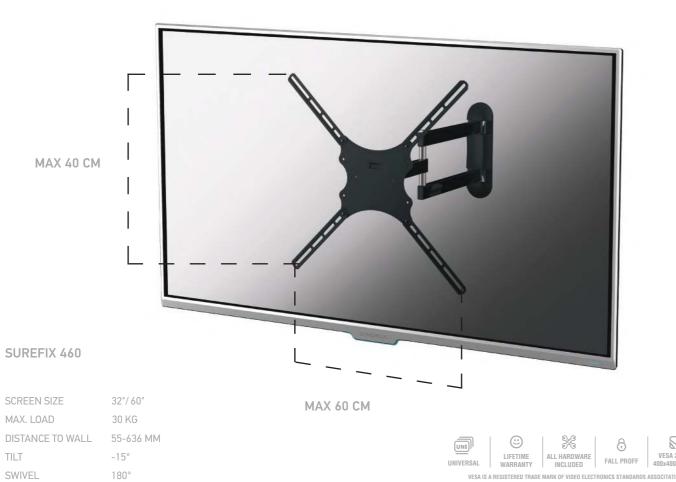

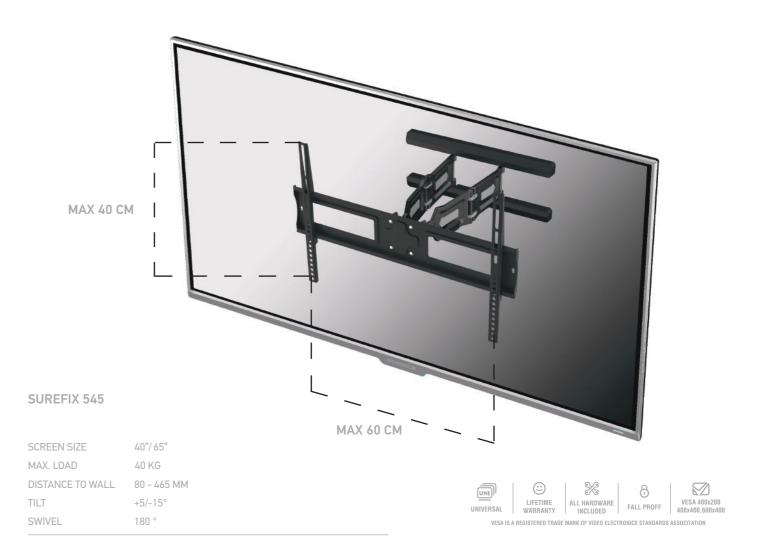



22 WALL MOUNTS 23

PROJECTOR



MAX. LOAD 14 KG DISTANCE TO CEILING 226 MM ±50°

360°

SUREFIX 910

SWIVEL

FIXED 20 CM

UNIVERSAL LIFETIME ALL HARDWARE FALL PROFF

MIN 22.6 CM MAX 113.2 CM

SOUNDBAR



SUREFIX SOUNDBAR

MAX. LOAD 30 KG

DESK

SUREFIX 715

SCREEN SIZE

MAX. LOAD

SWIVEL



SUREFIX 920

SWIVEL

MAX. LOAD DISTANCE TO CEILING 226-1137 MM ±50° TILT

WALL MOUNTS 25 24 WALL MOUNTS

CABLE CHANNEL



CC 50 CM / CC 100 CM AUDIO & VIDEO WALL SUPPORT

HEIGHT 50 CM / 100 CM
ALUMINIUM COLOR OPTIONS SILVER, BLACK





Cables

HDMI CABLE HDMI SWITCH

AUDIO CABLE IR REPEATER

USB CABLE HDMI ADAPTER

26 WALL MOUNTS 27

HDMI CABLES



HDMI FLEX

HDMI 19 PIN-M TO HDMI 19 PIN-M HDMI v1.4 COMPLIANT, SUPPORTS 1080P 100% TRIPLE SHIELD 24 K GOLD PLATED CONNECTORS OXYGEN FREE COPPER CONDUCTORS 180° FLEXIBILITY PLASTIC SHELL 1.5 M & 2 M LENGTH













HDMI°

HIGH SPEED with ETHERNET



HDMI BLACK

HDMI 19 PIN-M TO HDMI 19 PIN-M HDMI v1.4 COMPLIANT, SUPPORTS 1080P 100% TRIPLE SHIELD BLACK COLOR NYLON JACKET 24 K GOLD PLATED CONNECTORS OXYGEN FREE COPPER CONDUCTORS HIGH GLOSS METALLIC SHELL 1.5 M & 2 M & 3 M LENGTH

















HDMI PRO

HDMI 19 PIN-M TO HDMI 19 PIN-M HDMI v1.4 COMPLIANT, SUPPORTS 1080P 100% TRIPLE SHIELD 24 K GOLD PLATED CONNECTORS OXYGEN FREE COPPER CONDUCTORS PLASTIC SHELL 5 M, 10 M, 15 M, 20 M LENGTH













HDMI ULTRA HD

1.5 M, 2 M & 3 M XLENGTH

HDMI 19 PIN-M TO HDMI 19 PIN-M HDMI v1.4 COMPLIANT, SUPPORTS 1080P - 2160P 100% TRIPLE SHIELD BLACK COLOR NYLON JACKET 24 K GOLD PLATED CONNECTORS OXYGEN FREE COPPER CONDUCTORS PLASTIC SHELL













HDMI®







HDMI SILVER

HDMI 19 PIN-M TO HDMI 19 PIN-M
HDMI v1.4 COMPLIANT, SUPPORTS 1080P
100% TRIPLE SHIELD
SILVER COLOR NYLON JACKET
24 K GOLD PLATED CONNECTORS
OXYGEN FREE COPPER CONDUCTORS
PLASTIC SHELL
1.5 M & 2 M LENGTH





HDMI NEO

HDMI 19 PIN-M TO HDMI 19 PIN-M
HDMI v1.4 COMPLIANT, SUPPORTS 1080P
100% TRIPLE SHIELD
BLACK COLOR NYLON JACKET
24 K GOLD PLATED CONNECTORS
OXYGEN FREE COPPER CONDUCTORS
PLASTIC SHELL
1.5 M LENGTH





HDMI SLIM

HDMI 19 PIN-M TO HDMI 19 PIN-M
HDMI v1.4 COMPLIANT, SUPPORTS 1080P
100% TRIPLE SHIELD
WHITE & BLACK COLOR CABLE
24 K GOLD PLATED CONNECTORS
OXYGEN FREE COPPER CONDUCTORS
SHORT PLASTIC SHELL
1.5 M & 3 M LENGTH





















HDMI EVO

HDMI 19 PIN-M TO HDMI 19 PIN-M
HDMI v1.4 COMPLIANT, SUPPORTS 1080P
100% TRIPLE SHIELD
24 K GOLD PLATED CONNECTORS
OXYGEN FREE COPPER CONDUCTORS
PLASTIC SHELL
1.5 M & 3 M LENGTH







RNET 3D 3D BL





30 CABLES 31

AUDIO CABLE





OPTIC

Fiber Optic / Toslink Audio connection For transmitting the optical digital audio signal, e.g. CD player to amplifie 1.5 M, 3 M LENGTH













USB CHARGING & DATA CABLE USB 2.0 COMPATIBLE 1.5 M LENGTH

Micro USB





USB CABLE





MINI USB

USB CHARGING & DATA CABLE USB 2.0 COMPATIBLE 1.5 M LENGTH









HDMI SWITCH

HDMI V1.4A COMPLIANT HDCP 1.2 COMPLIANT

COMPACT SIZE, SMART AND FAST SWITCHING

FULL HD 1080P, 3D SUPPORT

HIGH QUALITY FINISHING

WITH 0.9M HDMI CABLE











IR PEREATER



IR REPEATER

Full Control for Home Theater Components Located Behind Cabinet Doors

HIDDEN IR REPEATER BOX 3 OUTPUT EMITTERS (1M) CORD 3 OUTPUT EMITTERS (2M) CORD IR RECEIVER WITH 1M CORD AND 4-PIN DIN CONNECTOR PLUG-IN POWER SUPPLY











Accessories

REMOTE STAND

SCREEN SOLUTION

MONITOR STAND

SURGE PROTECTOR

HDMI ADAPTER



Female to Mini Hdmi Male













35 34 CABLES

REMOTE STAND 500

Brown



Grey



White



Black







MONITOR STAND



MAX. LOAD: 10 KG



SCREEN SOLUTION

SCREEN SAVER

Sonorous Screen Saver reduces the static electricity and provides UV protection. It can even be applied on warm screens and works on all CRT, TFT, LCD screens and furniture.

SIZE:150 ML















SURGE PROTECTOR





SP 01

SP 01 + 2 USB

SURGE PROTECTOR IS AN APPLIANCE DESIGNED TO PROTECT ELECTRICAL DEVICES FROM VOLTAGE SPIKES INCLUDING THOSE CAUSED BY LIGHTING. A SURGE PROTECTOR ATTEMPTS TO LIMIT THE VOLTAGE SUPPLIED TO AN ELECTRIC DEVICE BY EITHER BLOCKING OR BY SHORTING TO GROUND ANY UNWANTED VOLTAGES ABOVE A SAFE THRESHOLD.

POWER PROTECTION SOCKETS USB PORTS JOULES

230V - 16A MAX - 3680W MAX OVERLOAD (16A, 250V AC) SCHUKO x 1 2(5V DC, 2, 1A MAX.) 570





SURGE PROTECTOR IS AN APPLIANCE DESIGNED TO PROTECT ELECTRICAL DEVICES FROM VOLTAGE SPIKES INCLUDING THOSE CAUSED BY LIGHTING. A SURGE PROTECTOR ATTEMPTS TO LIMIT THE VOLTAGE SUPPLIED TO AN ELECTRIC DEVICE BY EITHER BLOCKING OR BY SHORTING TO GROUND ANY UNWANTED VOLTAGES ABOVE A SAFE THRESHOLD.



POWER MAX SPIKE VOLTAGE CLAMPING VOLTAGE RESPONSE TIME EMI / RFI FILTER SOCKETS **JOULES**

250V - 16A MAX - 3680W MAX 6000V 775V FLOW BETWEEN POLES 1050J 8/20 MS FLOW 36000A 1NS 150KHZ - 100MHZ SCHUKO X 5